

PRODUCT SPECIFICATION

SAFETYWARE 3-Ply Kids Premium Face Mask (Earloop)

- This face mask provide nose and mouth protection against dust, pollen, bacterial and more.
- Made with premium quality Meltblown filter which offers high Bacterial Filtration Efficiency (BFE) of $\geq 99\%$.
- Outer layer is made of hydrophobic non woven polypropylene which provide good fluid splashes resistance while maintaining good breathability.
- The inner soft non woven polypropylene layer is hydrophilic which absorb droplets from the wearer effectively and makes the masks comfortable to wear.
- Adjustable nose strip and flat elastic ear loop to give basic protection to the user.
- Made by ultrasonic welding technology which provides strong bonding of mask & earloop.
- Comes with a smart pulls dispenser box which makes it convenient to pull up a mask.
- Features:
 - Soft & comfortable
 - Hypoallergenic
 - Low breathing resistance
 - Adaptable nose bar
 - Perfect fitting
 - UV sanitized
 - Disposable
- Made in Malaysia.


STORAGE

- The face mask shall maintain it's properties in a closed pack and stored in a cool dry condition.

ITEM CODE

ITEM CODE	COLOUR
1302KID-BLU-50	Blue
1302KID-PNK-50	Pink

Item Code: 1302ELKID

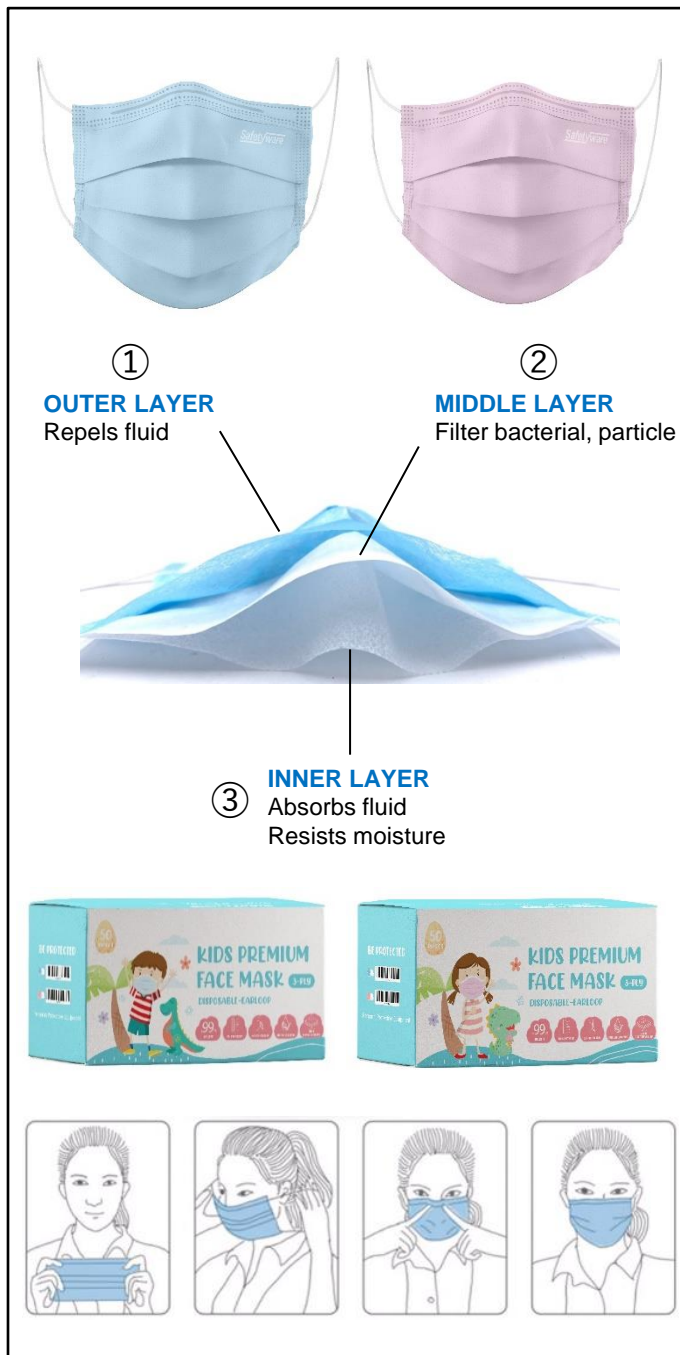

SAFETYWARE SDN. BHD. (632971-X)

Plot 237, Lengkok Perindustrian Bukit Minyak 3,
Bukit Minyak Industrial Estate,
14100 Simpang Ampat, Penang, Malaysia

Tel : +604-5023 882 | Fax : +604-5081 882
www.safetyware.com | info@safetyware.com

It is the product users' responsibility to conduct all the appropriate evaluations & testing to determine the suitability of SAFETYWARE products for use in a particular environment or purpose. SAFETYWARE disclaims all warranties other than as expressly provided.

Date created: 07/07/2021

Revision: 03

Date revised: 13/01/2022

PRODUCT SPECIFICATION

TECHNICAL DATA

COLOR	Blue, Pink
STYLE	3-Ply with earloop
SIZE	14.5 cm x 9.5 cm
FILTRATION EFFICIENCY	BFE: $\geq 99\%$ PFE: $\geq 99\%$
TESTING METHOD	ASTM F2101 & EN 14683: Bacterial Filtration Efficiency (BFE) ASTM F2299: Particle Filtration Efficiency (PFE) ASTM F1862 & ISO 22609: Synthetic Blood Penetration Resistance ASTM F2100 & EN 14683: Differential Pressure (Delta-P) EN 14683: Microbial Cleanliness
STANDARDS OF COMPLIANCE	EN 14683 Type IIR ASTM F2100 Level 2
APPROVAL	MDA Certified (Registration No.: GA2381721-76464) Australian TGA Approved (ARTG: 340746)
SHELF LIFE	2 years from manufacture date
PACKAGING	50 pcs/ box, 40 boxes/ carton

SAFETYWARE SDN. BHD. (632971-X)

Plot 237, Lengkok Perindustrian Bukit Minyak 3,
Bukit Minyak Industrial Estate,
14100 Simpang Ampat, Penang, Malaysia

Tel : +604-5023 882 | Fax : +604-5081 882
www.safetyware.com | info@safetyware.com

It is the product users' responsibility to conduct all the appropriate evaluations & testing to determine the suitability of SAFETYWARE products for use in a particular environment or purpose. SAFETYWARE disclaims all warranties other than as expressly provided.

Date created: 07/07/2021

Revision: 03

Date revised: 13/01/2022